
## **PRODUCT DATA DRAWING**

	REVISION HISTORY		
REV	DESCRIPTION	DATE	APPROVED
-	NRN 47438	05/23	
			SEE PDM

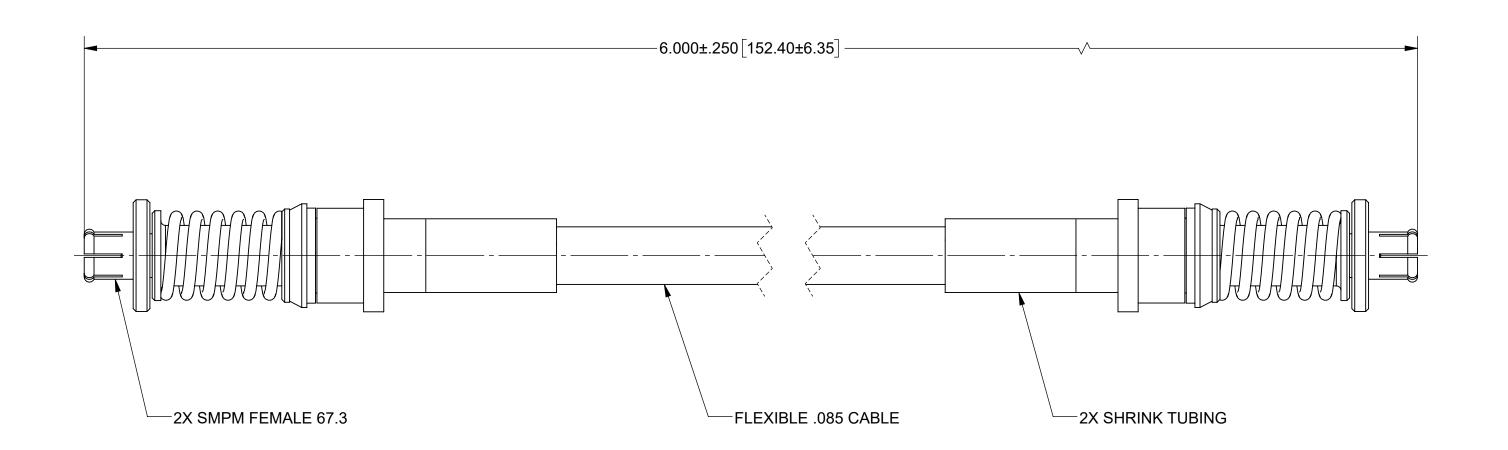

## **COMPONENTS:**

CONNECTORS: 2X SMPM FEMALE VITA 67.3 (3221-40066)

CABLE: FLEXIBLE .085 CABLE (200-70-139)

SHRINK TUBING: M23053/5

## PERFORMANCE:

IMPEDANCE: 50 OHMS FREQ. RANGE: DC TO 40.0 GHz.

SEE NOTES
SEE NOTES
REA: N/A
PROPRIETARY
TION CONTAINED IN THIS DRAW PROPERTY OF SV MICROWAVE, UCTION IN PART OR AS A WHOL WRITTEN PERMISSION OF VE, INC IS PROHIBITED.

DIMENSIONS ARE IN INCHES TOLERANCES:
FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' +15'
DECIMAL: .X ±.030 .XX ±.010
.XXX ±.005
INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14 5M - 1994
TERMINE THEOM 1004
THIRD ANGLE PROJECTION

±1°0' °X'±15'	1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES. 005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SUFFACE ROUGHNESS 63-ML-STD-10. 6) DIA. S ON COMMON CENTERS TO BE CONCENTRI WITHIN. 005 T.I.R. 7) REMOVE ALL BURRS	
ION	DRAWN:	SJ 05/10/23

CHECKED:

APPROVED:

UNLESS OTHERWISE SPECIFIED

	MICROWAVE www.svmicrowave.com	
LE:	SMPM FEMALE VITA 67.3 TO	J
	SMPM FFMALE VITA 67.3.6	"

			50D 005 04D	,
SJ 05/10/23	FOR .085 CABLE			
SEE PDM	SIZE <b>B</b>	DWG. NO.	7032-9	9734
SEE PDM	S	CALE: 6:1		SHEET 1 OF 1