
PRODUCT D

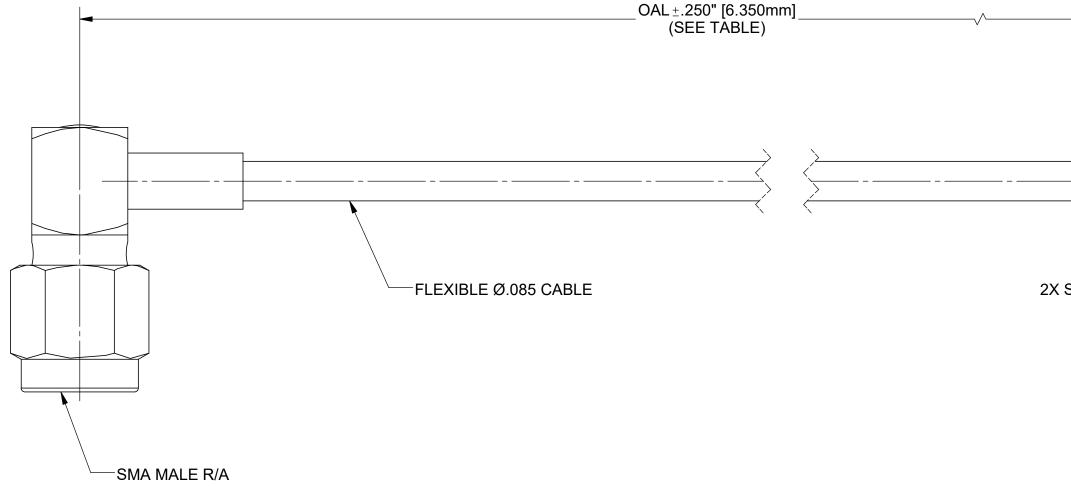

COMPONENTS:

CONNECTORS	SMA MALE R/A (SF2915-6001)
	SMP FEMALE R/A (1222-4011)
CABLE:	FLEXIBLE Ø.085 CABLE (200-70-139)
SHRINK TUBING:	M23053/5

PERFORMANCE:

IMPEDANCE:	50 OHMS
FREQ. RANGE:	DC TO 12.4 GHz.

DATA DRAWIN			REVI: DESCRIPTIC NRN 47474 DCN 52622	SION HISTORY IN DATE 05/23 06/23	APPROVED SEE PDM		
OAL ±.250" [6.350mm] (SEE TABLE)		2X SHRINK TU	JBING-	EMALE R/A			
			S	V P/N	OAL		
				29-4047	9.843" [250.0		
	DIMENSIONS ARE IN INCHES TOLERANCES:		702	29-4048	19.685" [500.	000mm]	
SEE NOTES	FRACTIONAL: <u>+</u> 1/64 ANGULAR: X* <u>+</u> 1°0' X*X' +15'	UNLESS OTHERWISE 1) ALL DIMENSIONS ARE IN INCHES (M 2) ALL DIMENSIONS ARE AFTER PLAT 3) BREAK CORNERS & EDGES .005 R.		S	WWW.svmicrowave.com		
FINISH: SEE NOTES SURFACE AREA: N/A	DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005	4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63∝MIL-STE 6) DIA.'S ON COMMON CENTERS TO B			TITLE: SMA MALE R/A TO SMP		
PROPRIETARY	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	WITHIN .005 T.I.R. 7) REMOVE ALL BURRS				BLE	
			(1)D 0E/01/00				
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF		DRAWN: K CHECKED:	KRR 05/24/23 SEE PDM	SIZE DWG. NO.	7029-40	5 CABLE	

REVISION HISTORY