



# 5G/4G Indoor/Outdoor Blade Omni Antenna

## DBA6171xx Series - 617-960 / 1427-7125 MHz 5G Hinged Swivel Blade Antenna Datasheet

DBA6171xx series 5G swivel blade antennas support harsh environments with both IP67 (outdoor) and non-rated (indoor) configurations.

With excellent performance from 617-7125 MHz the design is ruggedized to support high shock, vibration and humidity environments that may be experienced over the life of the product.

The articulating/hinged/swivel connections allows for a wide variety of installation and mounting options making this an extremely diverse antenna family for IoT or gateway device applications. Options are available with or without embossed TE logo, see page 2 for more details.

### FEATURES AND BENEFITS

- Global 5G coverage from 617-7125 MHz
- Ready for future 5G rollouts up to 7GHz
- Indoor and/or outdoor rated options
- Suitable for private 5G/Cellular installations
- Ideal for light industrial or factory settings where vibration may be present
- Ability to rotate and/or point the antennas for maximum coverage and efficiency
- Designed with firm connector resistance to avoid connectors loosening
- Robust hinge mechanism avoids the antenna drooping after installation

### ELECTRICAL SPECIFICATION

Operating Frequency (MHz)	617-698	698-960	1427-1606	1710-2200	2300-2700	3300-4200	5150-6000	6000-7125
VSWR - Avg	<1.9:1	<1.7:1	<1.7:1	<2.2:1	<1.7:1	<1.9:1	<1.8:1	<2.0:1
VSWR - Max	<2.5:1	<2.0:1	<3.5:1	<2.5:1	<2.3:1	<2.3:1	<2.3:1	<5.0:1
Peak Gain - Average (dBi)	-0.3	0.2	0.6	0.8	1.4	2.8	3.0	3.0
Peak Gain - Max (dBi)	0.0	1.0	1.0	2.1	2.1	3.9	4.4	4.4
Nominal Impedance (Ohms)	50							
Max Power Handling - Ambient 25°C (W)	5							
Polarization	Linear							
Antenna Type	Dipole							
Azimuth Beamwidth	360°, Omnidirectional							

### MECHANICAL SPECIFICATION


Dimensions - width x depth x height - mm (in.)	25 x 9.3 x 184 (0.98 x 0.37 x 7.24)
Weight - g (oz.)	30 (1.06)
Number of Ports	1
Connector	SMA male
Radome	Polycarbonate, UV-Rated for Outdoor Use

## ENVIRONMENTAL SPECIFICATION

Operating Temperature - °C (°F)	-40 to +85°C (-22 to +158°F)
Storage Temperature - °C (°F)	-40 to +85°C (-40 to +185°F)
Humidity Rating	MIL-STD-810G, 507.5, Procedure II, Aggravated Humidity @ 95%±4%
Flammability Rating	UL94-V2, US-FMVSS
Mechanical Shock Test Rating	IEC 60068-2-27, Structural Integrity of Mountings
Vibration Test Rating	IEC 60068-2-64, Stationary Installation, Category 3
Material Substance Compliance	RoHS Compliant

PART NUMBER	IP RATING	CONNECTOR	WIND SURVIVAL
DBA6171C1-BSMAM Indoor (TE Logo Embossed)	N/A	SMA male	N/A
DBA6171C2-BSMAM Indoor (No Logo)	N/A	SMA male	N/A
DBA6171C3-BSMAM Outdoor (TE Logo Embossed)	IP67	SMA male	60 MPH
DBA6171C4-BSMAM Outdoor (No Logo)	IP67	SMA male	60 MPH

## MECHANICAL DRAWINGS

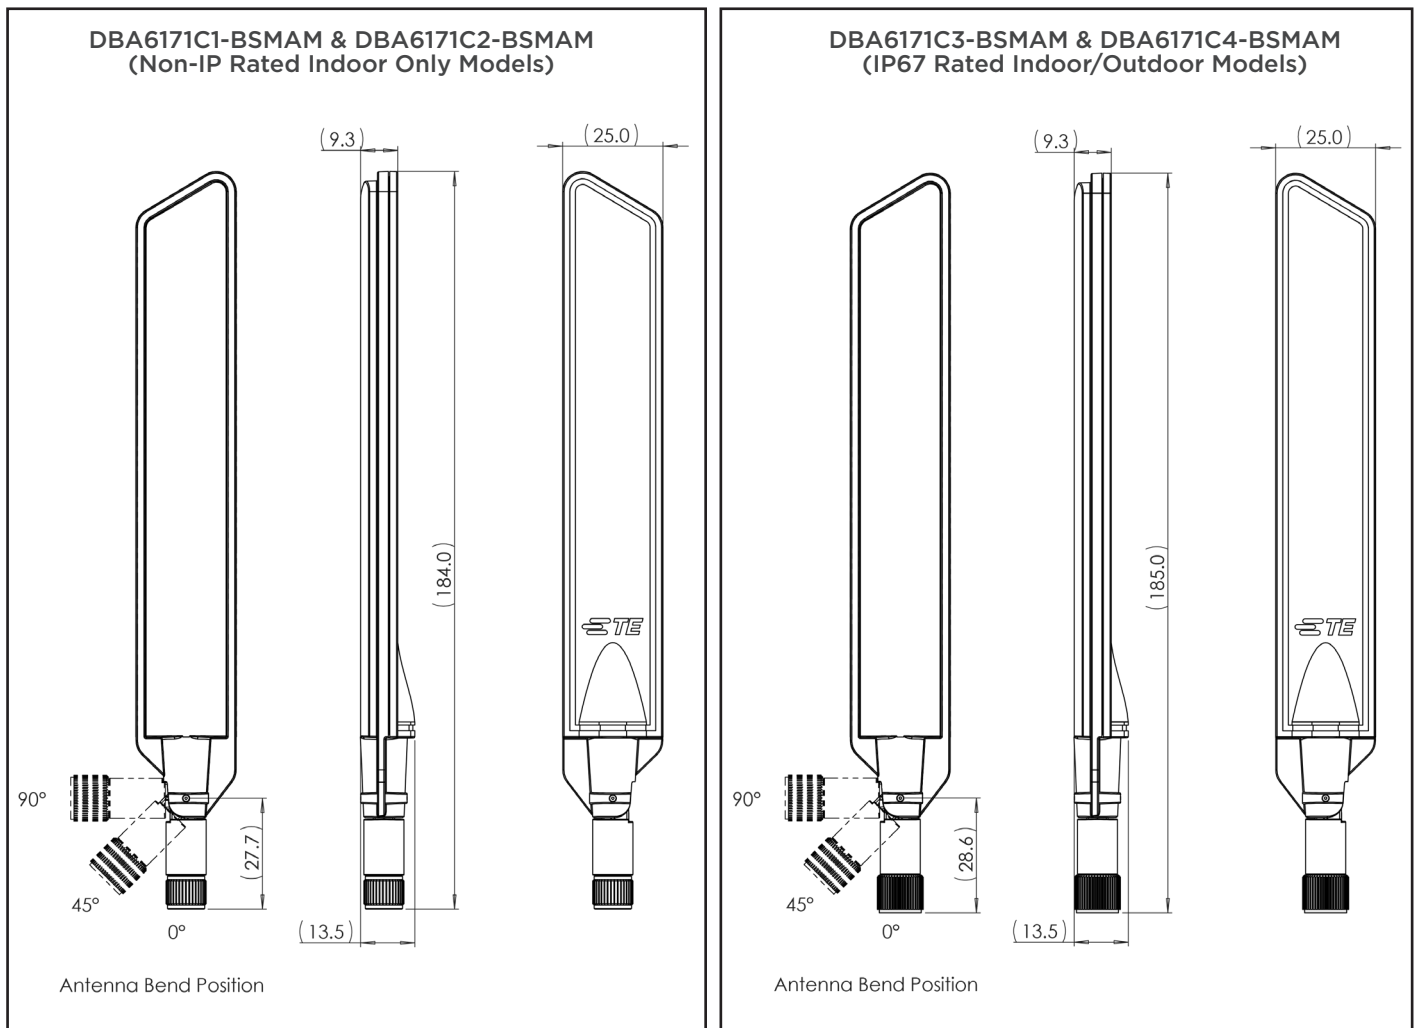

Please note the small difference in connector lengths and overall height between Non-IP and IP67 rated models above.


# RADIATION PATTERNS

## Key


- Non-IP Rated Indoor Only - DBA6171C1-BSMAM & DBA6171C2-BSMAM
- IP-67 Rated Indoor/Outdoor - DBA6171C3-BSMAM & DBA6171C4-BSMAM

## Radiation Patterns at 633 MHz


Theta = 90°

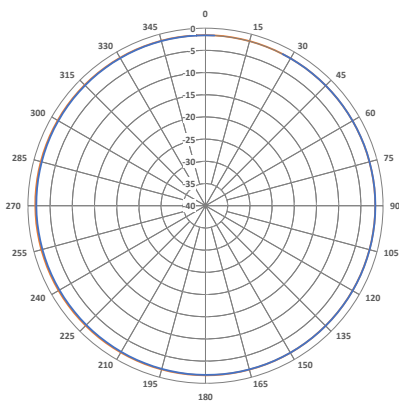

Phi = 0°

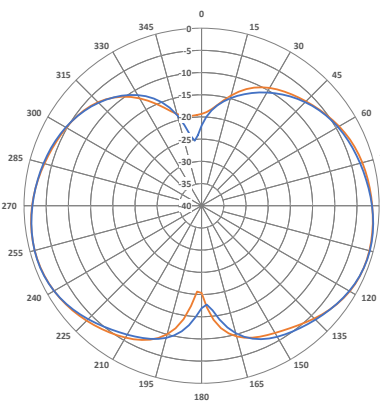


Phi = 90°

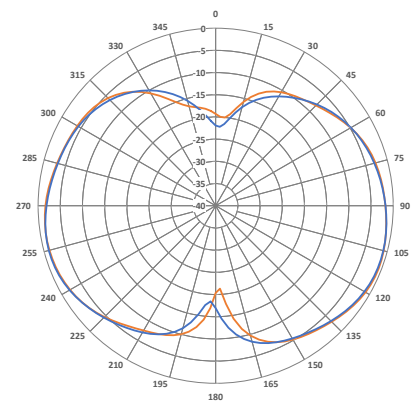


## Radiation Patterns at 725 MHz


Theta = 90°

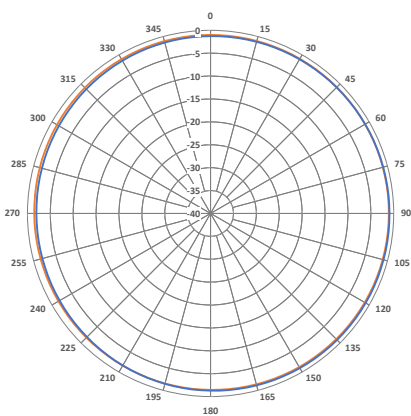

Phi = 0°

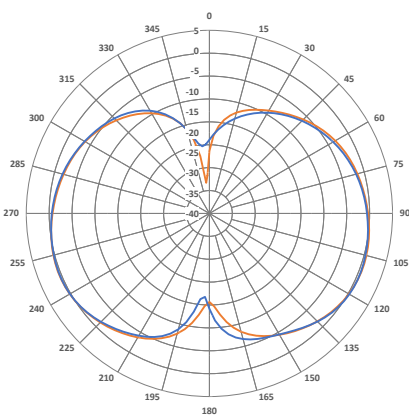


Phi = 90°

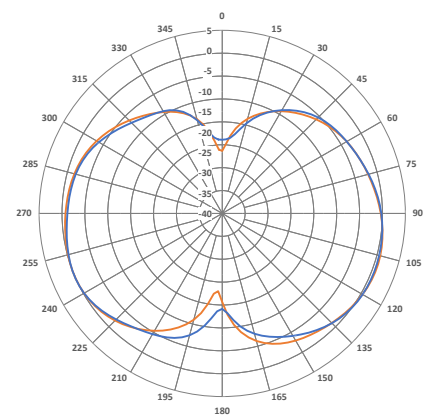


## Radiation Patterns at 850 MHz


Theta = 90°

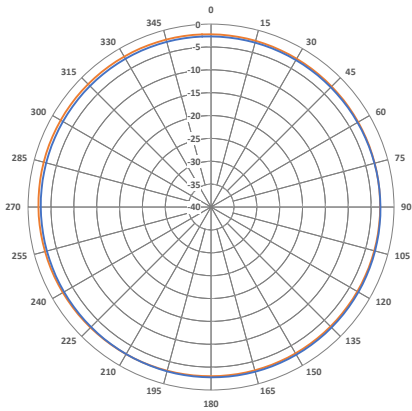

Phi = 0°

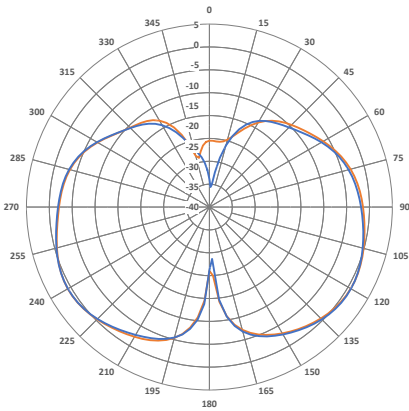


Phi = 90°

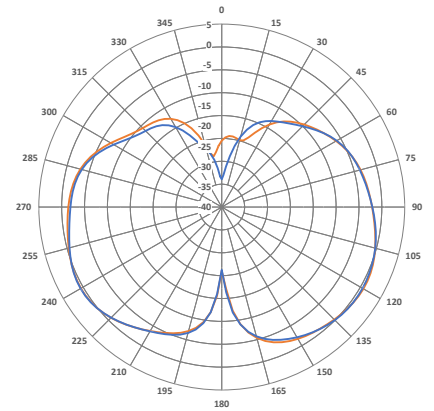


## Radiation Patterns at 925 MHz


Theta = 90°

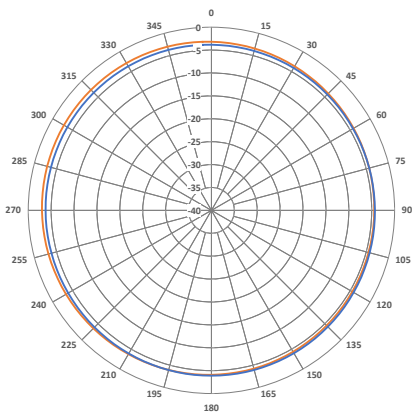

Phi = 0°

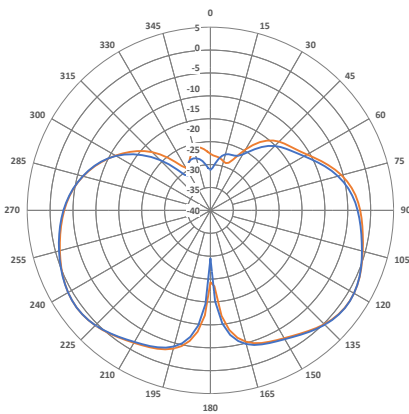


Phi = 90°

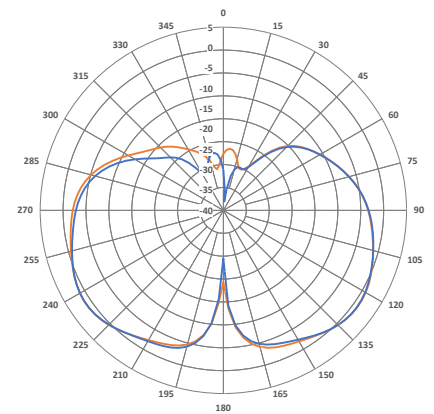


## Radiation Patterns at 1448 MHz


Theta = 90°

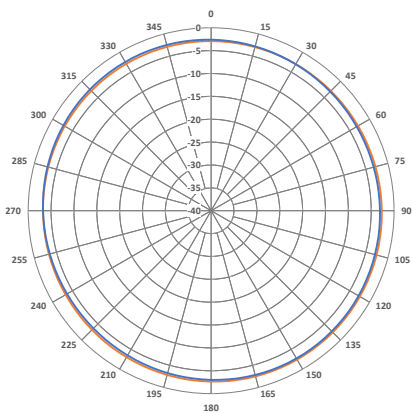




Phi = 0°

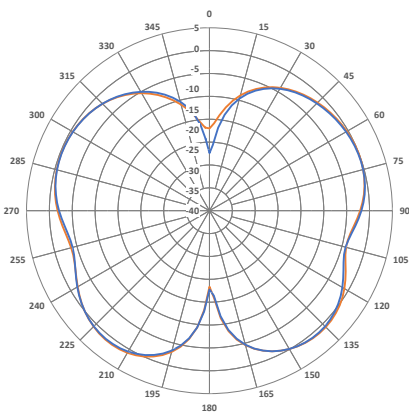




Phi = 90°

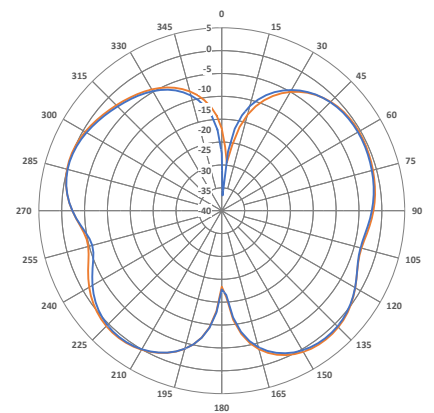




## Radiation Patterns at 1730 MHz

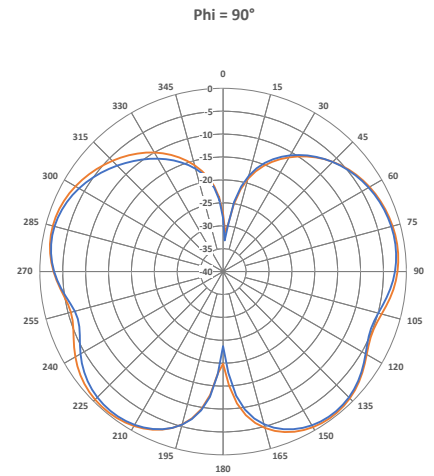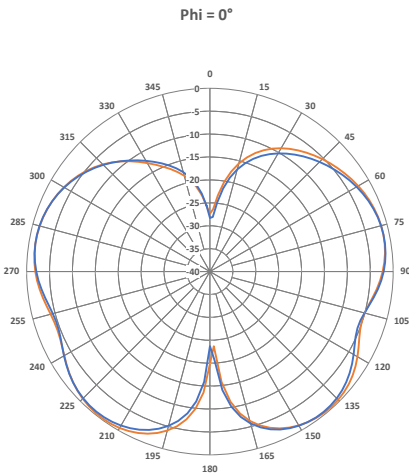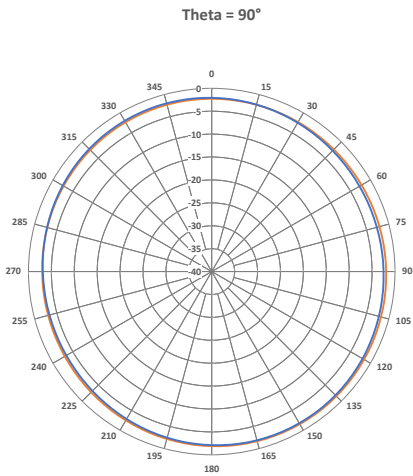


## Radiation Patterns at 1930 MHz

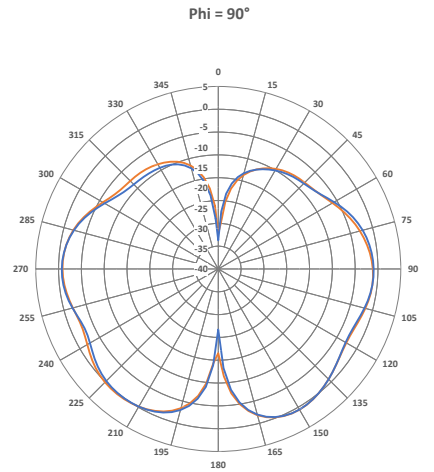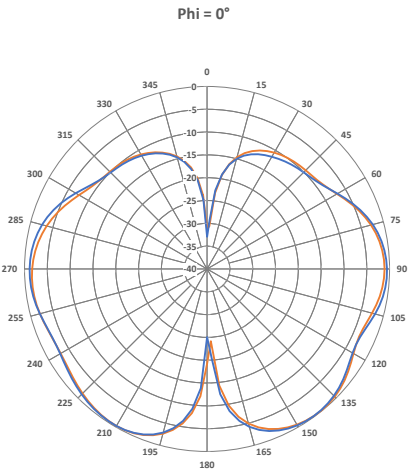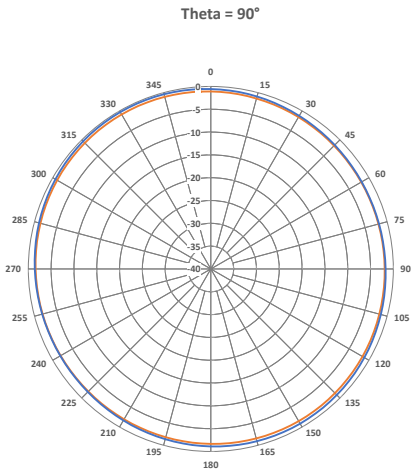


## Radiation Patterns at 2130 MHz

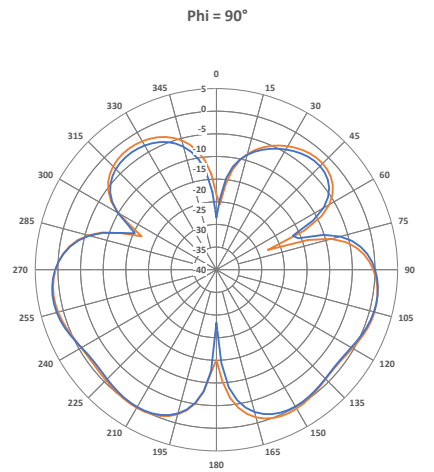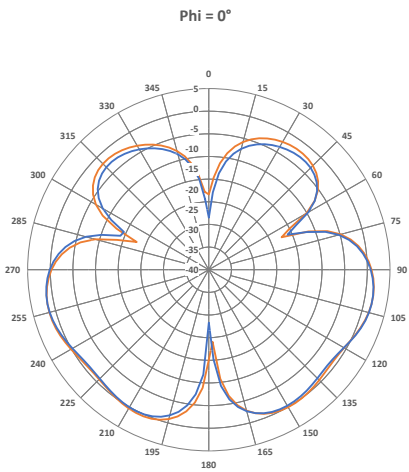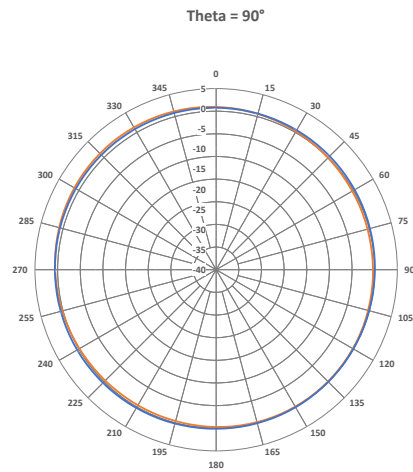


## Radiation Patterns at 2310 MHz

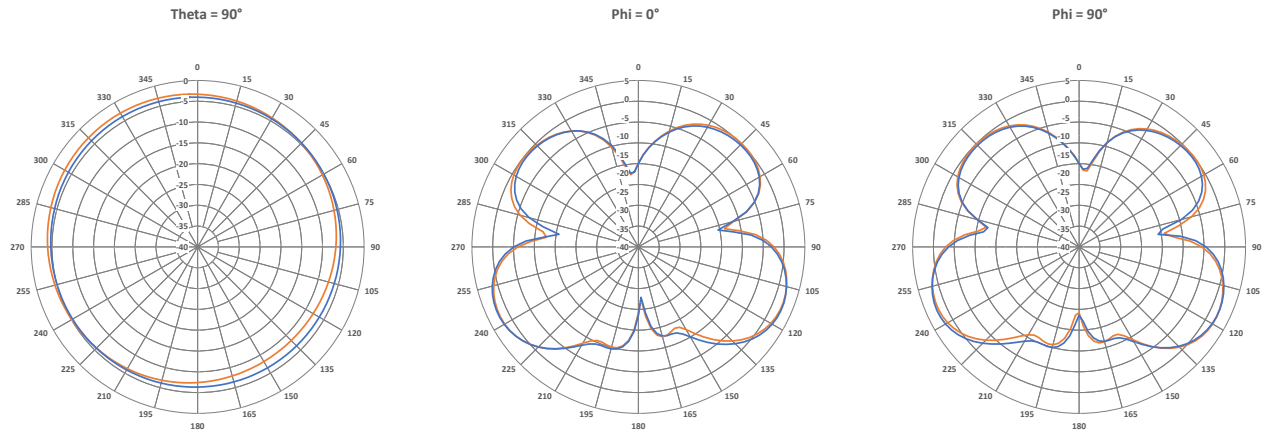




## Radiation Patterns at 2450 MHz

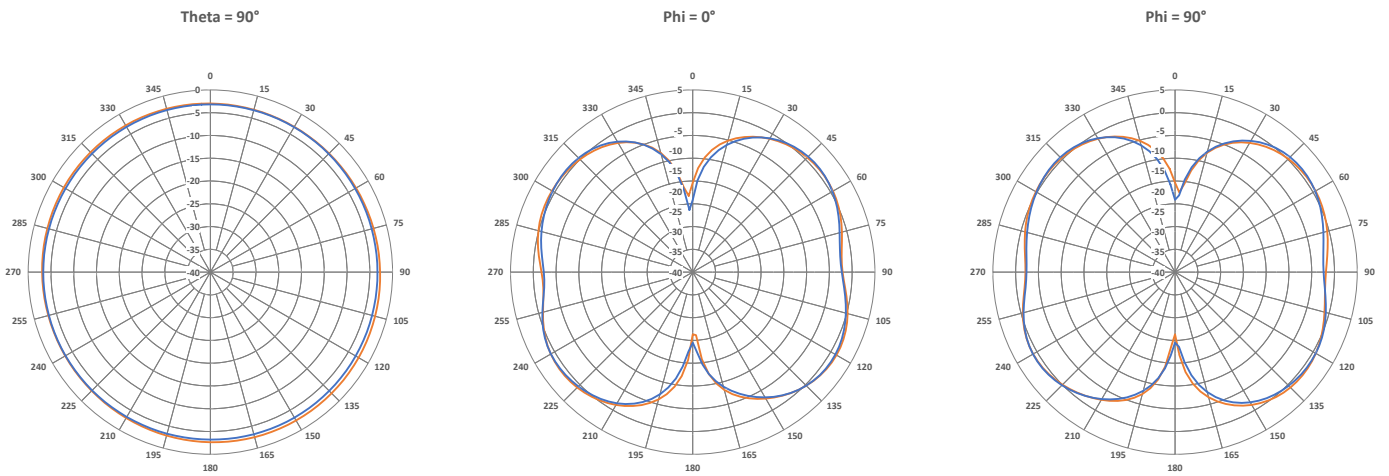




## Radiation Patterns at 2500 MHz

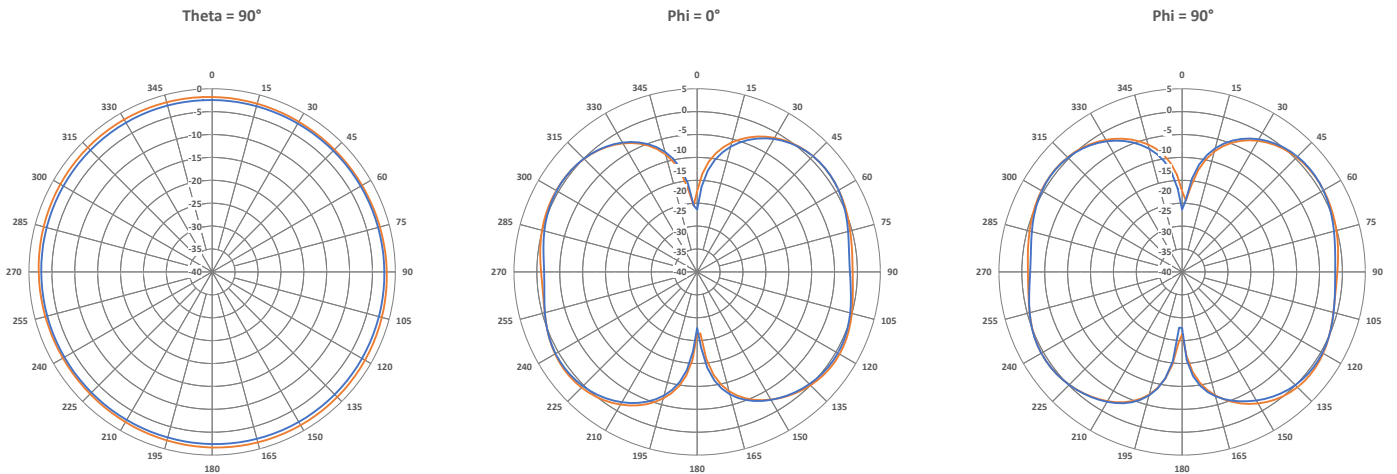




## Radiation Patterns at 2600 MHz

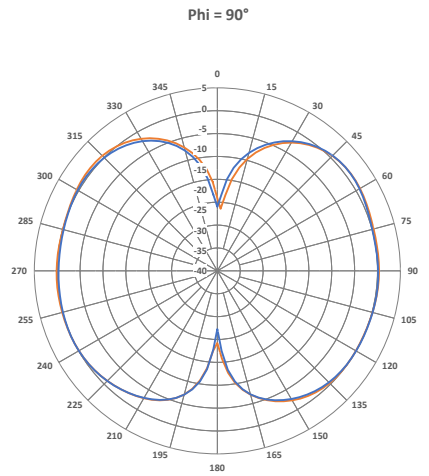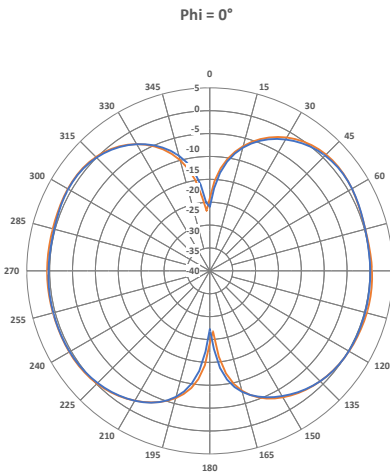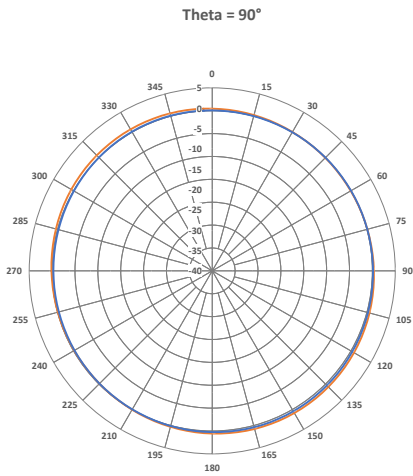

## Radiation Patterns at 3500 MHz

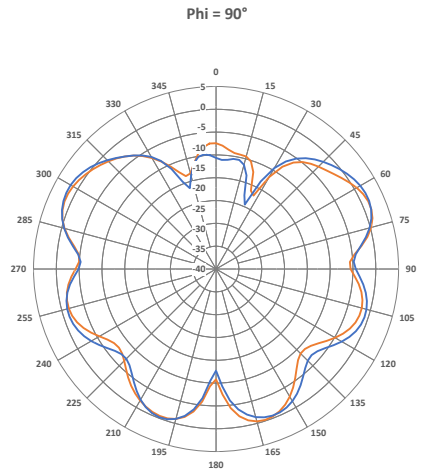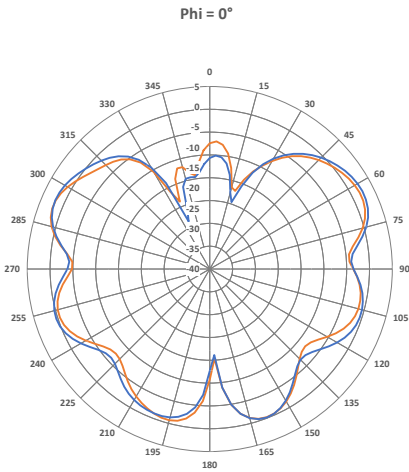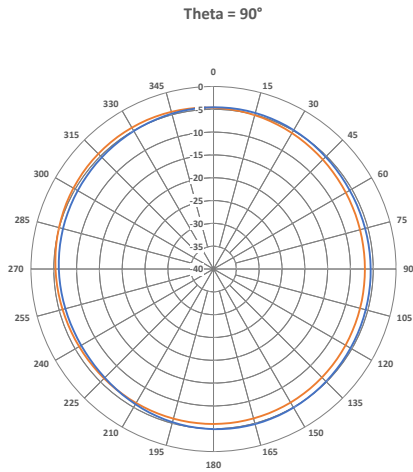


## Radiation Patterns at 3700 MHz

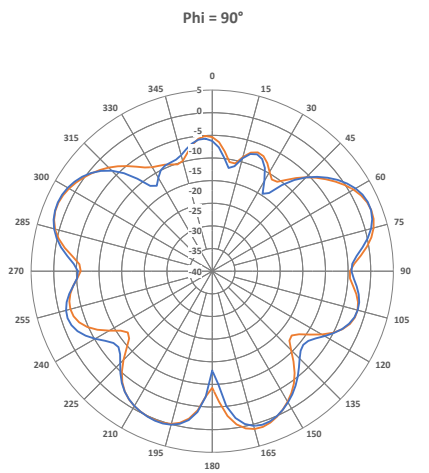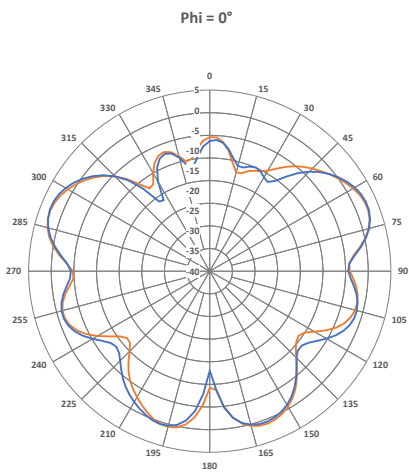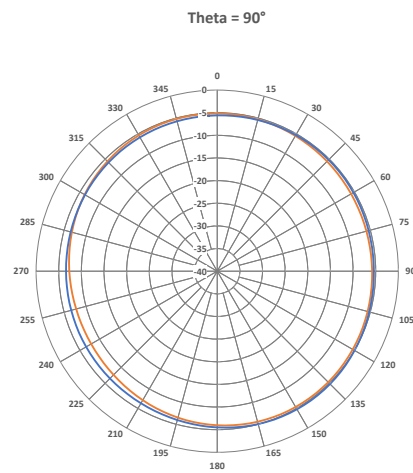


## Radiation Patterns at 5150 MHz


Theta = 90°

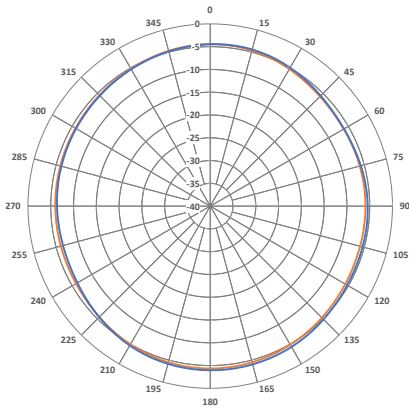

Phi = 0°

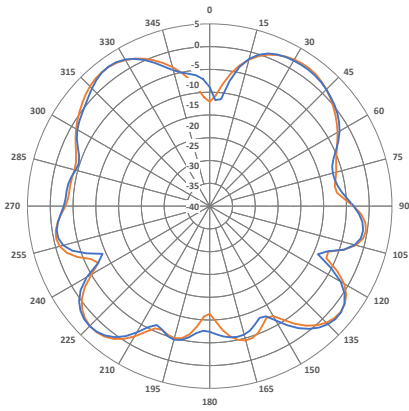


Phi = 90°

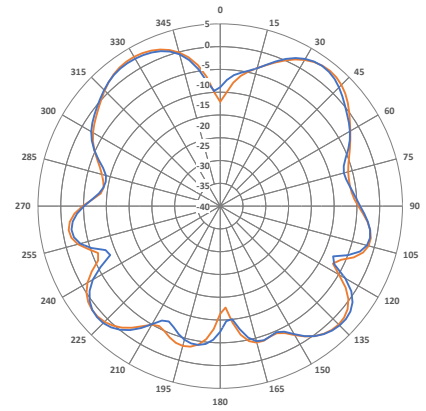


## Radiation Patterns at 5450 MHz


Theta = 90°

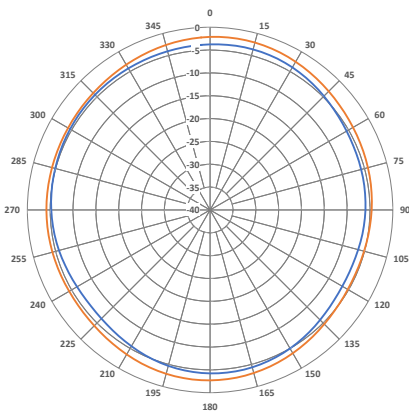

Phi = 0°

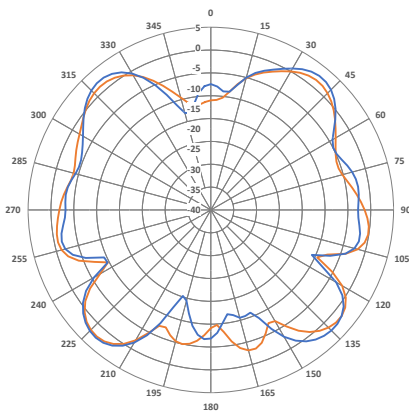


Phi = 90°

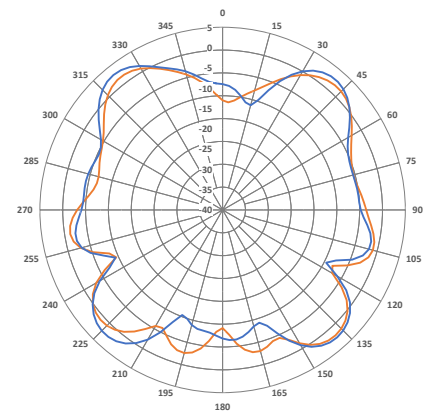


## Radiation Patterns at 5725 MHz


Theta = 90°

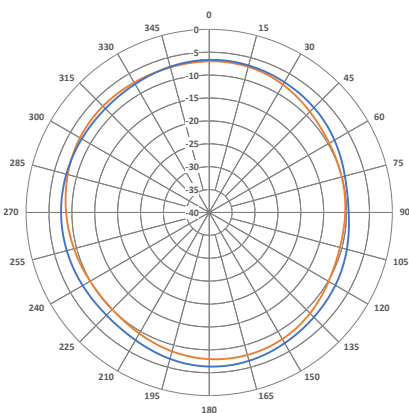

Phi = 0°

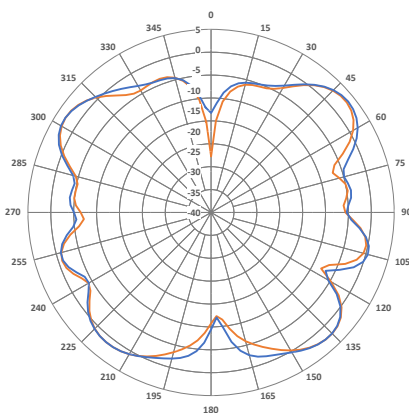


Phi = 90°

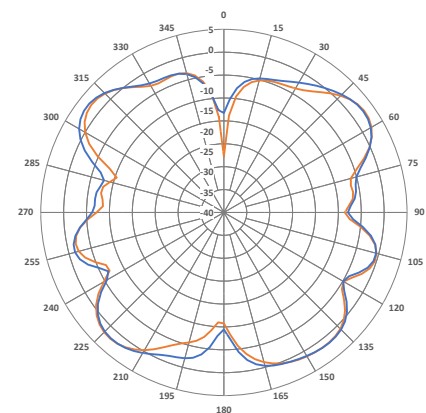




## Radiation Patterns at 5925 MHz


Theta = 90°

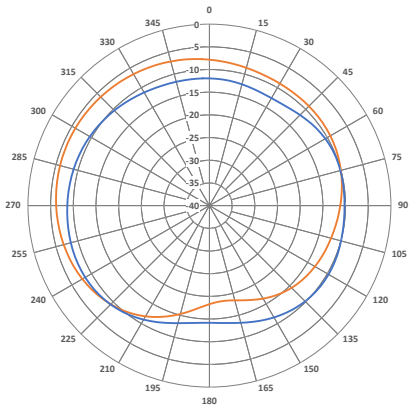

Phi = 0°

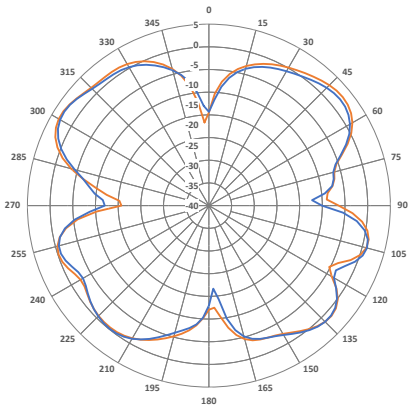


Phi = 90°

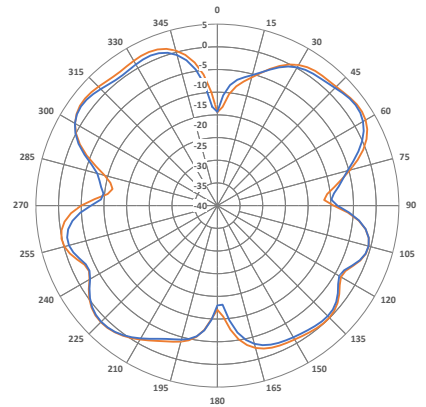


## Radiation Patterns at 6525 MHz


Theta = 90°

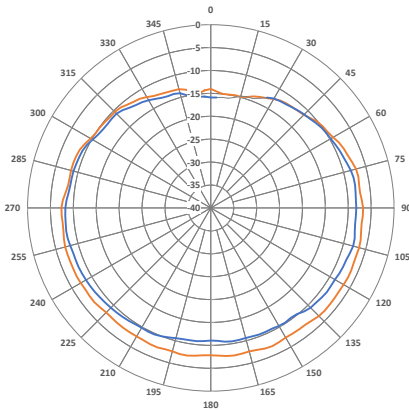

Phi = 0°

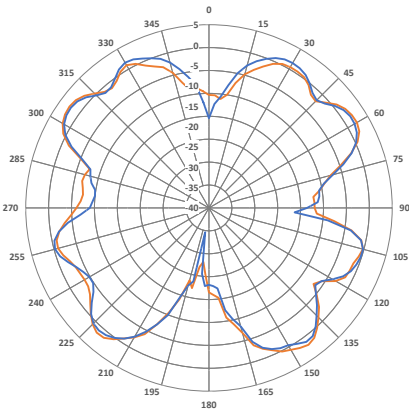


Phi = 90°

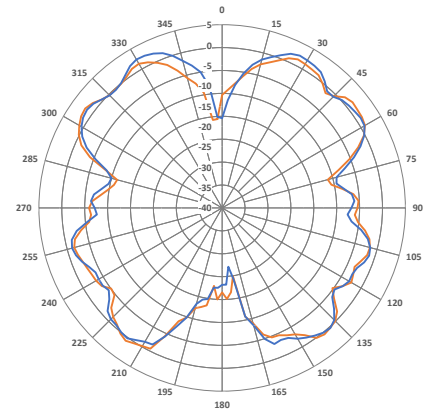


## Radiation Patterns at 7125 MHz


Theta = 90°

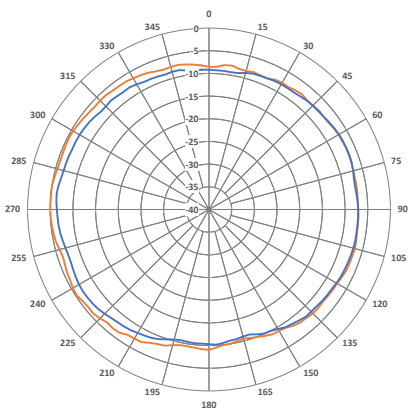

Phi = 0°

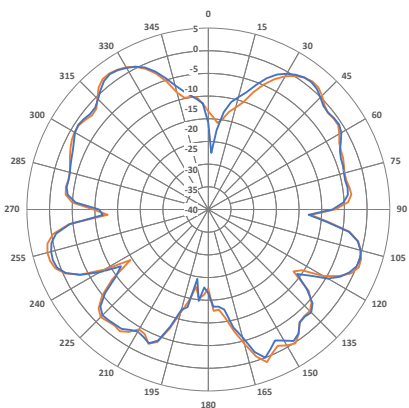


Phi = 90°

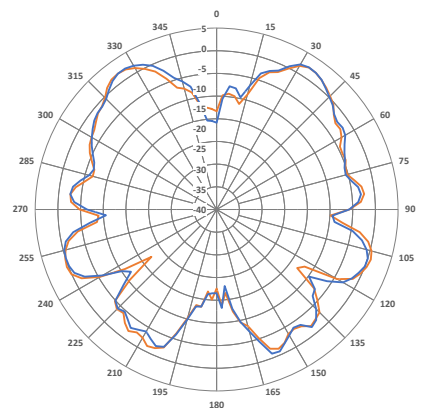


## PACKING INFORMATION

### PACKAGING - INDIVIDUAL CARTON

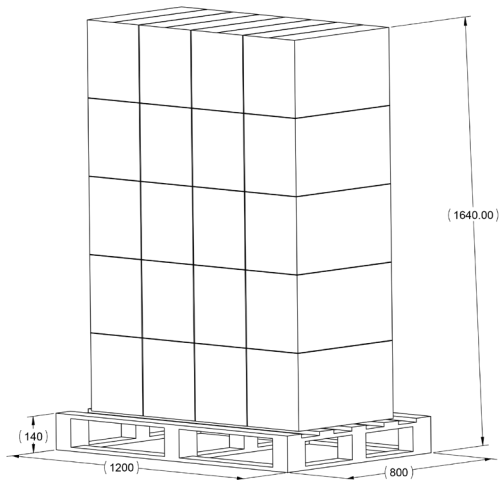


### PACKAGING - BULK PACK

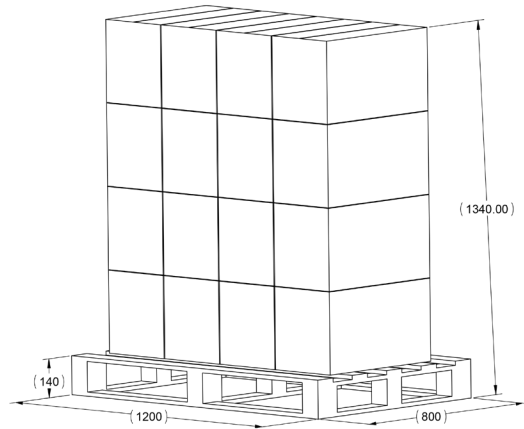

PACKAGED DIMENSIONS	UNIT CARTON	MASTER CARTON	AIR PALLET	OCEAN PALLET
Number of Antennas	30	240	3840	4800
Height cm(in)	14.5 (5.7)	29.5 (11.6)	134 (52.8)	164.0 (64.6)
Length cm(in)	25.0 (9.8)	52.0 (20.5)	120 (47.2)	120 (47.2)
Width cm(in)	12.5 (4.9)	26.0 (10.2)	80 (31.5)	80 (31.5)
Est. Shipping Weight kg (lbs)	1.1 (2.4)	9.4 (20.7)	152.4 (336.0)	190.0 (418.9)

### TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

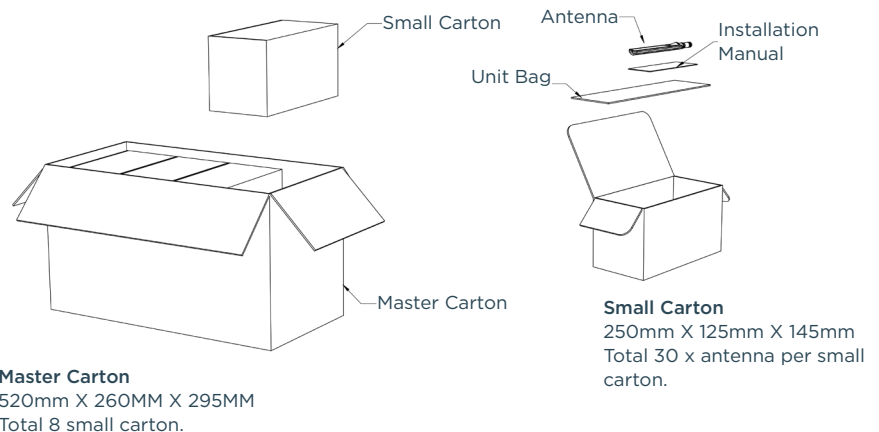

### te.com

TE, and TE connectivity (logo) are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE Connectivity product is installed. Useful lifetime of the original end product may vary but is not warranted to exceed one (1) year from the original date of the end product purchase.

©2022 TE Connectivity. All Rights Reserved.

12/22 Original